

Product Data Sheet

CrocGuard®

Last Updated: March 2024



Containment Level	MASH TL4
Impact Condition	10,000 kg rigid truck, 90km/h, 15°
Dynamic Deflection	0.9 m (16 m span)
Containment Level	MASH TL3
Impact Condition	2270 kg pick-up truck, 100km/h, 25°
Dynamic Deflection	0.8 m (16 m span)
Maximum Span between Abutment Posts	16 m
Available Beam Lengths	8 m, 10 m, 12 m, 14 m, 16m
Beam Width	280 mm
Beam Mass	280 kg per metre
System Height	1000 mm
Abutment Post Length	2150 mm
Abutment Post Dimensions	250 x 250 x 9 mm
Abutment Post Mass	150 kg
Compatible Connections	RamShield® High Containment RamShield® W-Beam MSKT Guardrail End Terminals




Product Data Sheet


CrocGuard®



PLAN VIEW

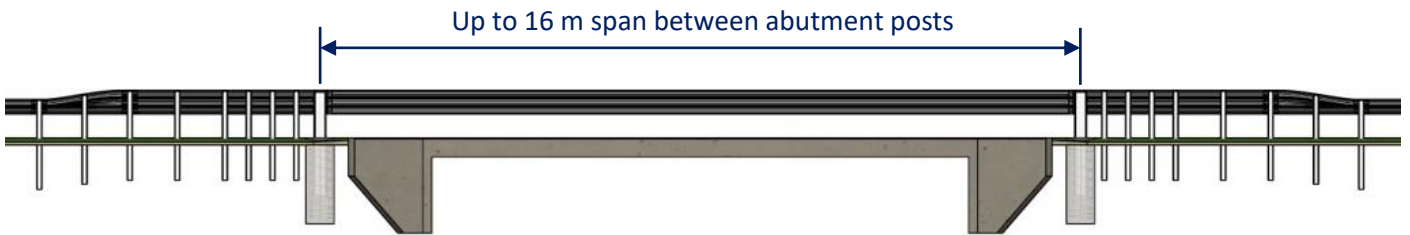

FRONT VIEW

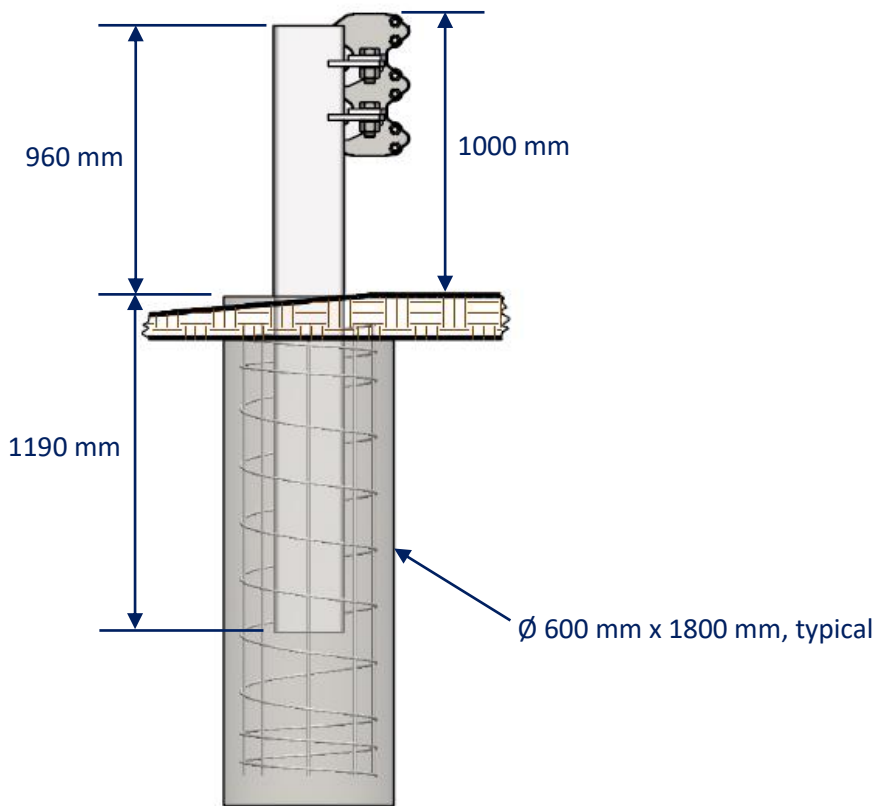

**ABUTMENT POST
SIDE ELEVATION**